



60CM 4 ZONE 13A FLEX INDUCTION HOB


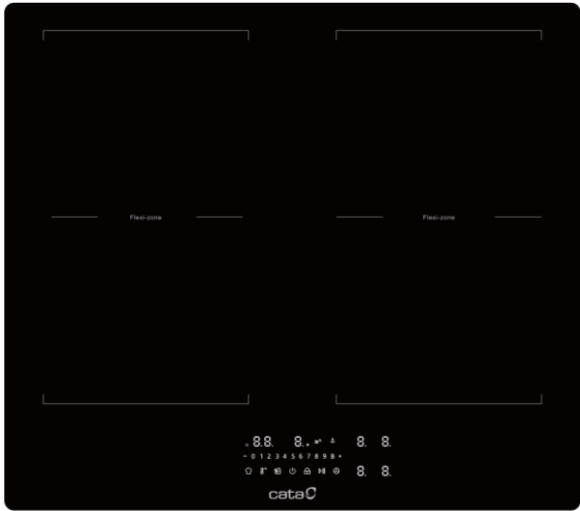


CATINDE60HF

EAN 8422248617895

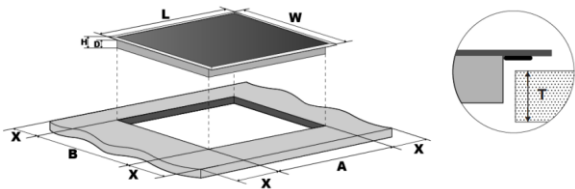

L	W	H	D	A	B	X	T min	T max
590	520	60	56	565	495	50	20	30



A	760 min
B	50 min
C	20 min
E	5 min

Main Features	
Brand	Cata
Hob Type	Induction
Heat Source	Electric
Colour / Finish	Black
No. of Zones	4
No. of Flex Zones	2
Max Cooking Power	2.8kW
Configurable Power Management	Yes, up to 7.2kW
No. of Power Settings	9 + 2 boost
User Controls	Hidden Touch Slider LED Display
No. of Warming Functions	4

Characteristics	
Cooking Surface	Black Glass (Schott Ceran)
Control Panel	Black Glass
Display Colour	White
Timer	1-99mins
Zone 1 (Front Left)	210x190mm, 2300/3000W Boost
Zone 2 (Rear Left)	210x190mm, 2200/2600W Boost
Zone 3 (Rear Right)	210x190mm, 2200/2600W Boost
Zone 4 (Front Right)	210x190mm, 2300/3000W Boost
Flex Zones	2x 210x385mm 3000/3600W Boost
Cooking Functions	Pause, Recall, Pot Move, Pasta/Rice
Warming Functions	Melt (42°C) / Defrost (55°C) / Keep Warm (70°C) / Simmer (90°C)
Chef Mode	Chef, Grill, BBQ
Hob-to Hood Connectivity	RF
Residual Heat Indicator	3 Level
Safety	Pot Detection, Child-Lock, Key-Lock, Over Temperature Safety Shutoff, Cooling Fan, Small Article Detection, Auto Shutdown Protection
Min. Worktop Thickness	20 mm
Fixings	Spring Clips
Worktop Seal	Yes

Technical Data	
Rated Voltage	220-240V ~ 50/60Hz
Max Power	2,800W ~ 7,200W
Supply Connection	13A / 32A Configurable
Cable / Plug (Fitted)	1.0m / UK 3 Pin (for 13A only)
32A Accessory Cable (Supplied)	1.0m
Energy Efficiency Class	n/a
Energy Consumption of Hob	182.8 Wh/kg

Dimensions & Weights	
Product (WxDxH)	590 x 520 x 60 mm
Built-In Niche (WxD)	565 x 495 mm
Packed Product (WxDxH)	650 x 595 x 110 mm
Net Weight	11.4 kg
Gross Weight	12.4 kg